

# 95030, 95040, 95050, 95060 SERIES

## Straight Line Action Clamps | Product Overview

### Features:

- Low profile with high holding capacities
- Cast steel base and handle
- Allow handle to rotate and fall below mounting plane to lock in retracted position

### Applications:

- Assembly
- Testing
- Tensioning devices

### Also Available:

See page MC-ACC-1 for accessories

95030


95040

95050 ⓘ

95060 ⓘ




## Technical Information | Holding Capacities

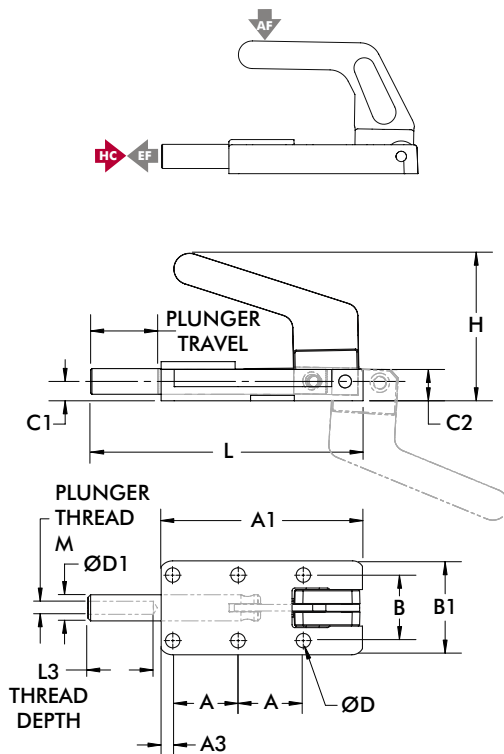

| Model   | Max. Holding Capacity | Weight               | EF:AF (pushing) | Plunger Travel | (M) Plunger Thread | Recommended Spindle (Not Supplied) |
|---------|-----------------------|----------------------|-----------------|----------------|--------------------|------------------------------------|
| 95030   | [550 lbf]<br>2450 N   | [0.80 lb]<br>2,58 kg | 15:1            | [0.98]<br>24,9 | M6                 | 205203-M                           |
| 95040   | [1100 lbf]<br>4900 N  | [1.60 lb]<br>0,73 kg | 12:1            | [1.50]<br>38,1 | M8                 | 207203-M                           |
| 95050 ⓘ | [1650 lbf]<br>7340 N  | [2.10 lb]<br>0,95 kg | 15:1            | [1.97]<br>50   | M12                | 220203-M                           |
| 95060 ⓘ | [3960 lbf]<br>17600 N | [6.4 lb]<br>2,9 kg   | 15:1            | [2.36]<br>60   |                    |                                    |

ⓘ This item is available upon request

HC = Holding Capacity, EF = Exerting Force, AF = Applied Force



| Part No. | A            | A1              | A3             | B            | B1             | C1            | C2             | ØD             | ØD1          | H              | L               | L3*          |
|----------|--------------|-----------------|----------------|--------------|----------------|---------------|----------------|----------------|--------------|----------------|-----------------|--------------|
| 95030    | [0.98]<br>25 | [3.03]<br>77    | [0.17]<br>4,4  | [0.98]<br>25 | [1.41]<br>35,9 | [0.30]<br>7,5 | [0.48]<br>12,2 | [0.22]<br>5,5  | [0.39]<br>10 | [2.11]<br>53,7 | [4.13]<br>105   | [0.98]<br>25 |
| 95040    | [1.38]<br>35 | [4.29]<br>109   | [0.31]<br>7,9  | [1.38]<br>35 | [2.00]<br>50,7 | [0.39]<br>10  | [0.72]<br>18,3 | [0.26]<br>6,5  | [0.55]<br>14 | [3.03]<br>77   | [5.87]<br>149,1 | [1.38]<br>35 |
| 95050 ⓘ  | [1.77]<br>45 | [5.45]<br>138,5 | [0.34]<br>8,7  | [1.77]<br>45 | [2.60]<br>66   | [0.55]<br>14  | [0.94]<br>23,8 | [0.33]<br>8,5  | [0.75]<br>19 | [3.02]<br>76,7 | [7.47]<br>189,8 | [2.17]<br>55 |
| 95060 ⓘ  | [2.17]<br>55 | [6.57]<br>167   | [0.40]<br>10,2 | [2.17]<br>55 | [3.03]<br>77   | [0.63]<br>16  | [1.08]<br>27,4 | [0.41]<br>10,5 | [0.87]<br>22 | [3.69]<br>93,8 | [9.02]<br>229   | [2.56]<br>65 |

ⓘ This item is available upon request

\*Minimum

