


REMOTE MOUNTED DIRECTIONAL CONTROL VALVES




Valve Operation	Valve Type	Use With Cylinder	Model Number	Hydraulic Symbol	Schematic Flow path			Weight (lbs)
Manual	3-Way, 3 Position, Tandem center	Single Acting	PR33					3.53
	3-Way, 3 Position, Closed center		PR33C					3.53
	3-Way, 3 Position, Tandem center, Locking		PR33L					5.73
	3-Way, 3 Position, Closed center, Locking		PR33CL					5.73
	4-Way, 3 Position, Tandem center		PR43					3.53
	4-Way, 3 Position, Tandem center, Locking		PR43L					5.73
Manual	4-Way, 3 Position, Closed center	Double Acting	PR43C					3.53
	4-Way, 3 Position, Tandem, Closed center, Locking		PR43CL					5.73

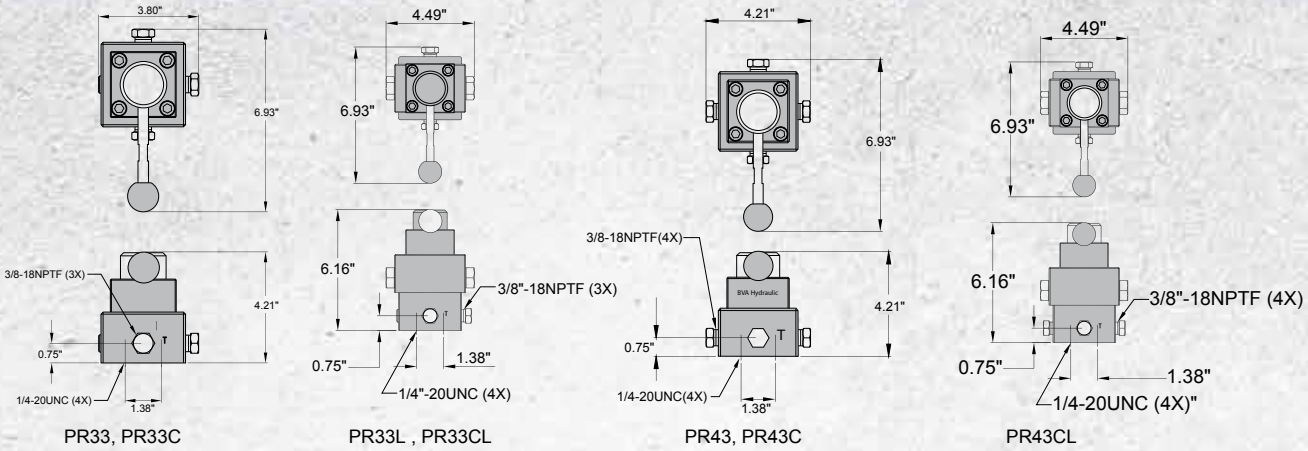

PR33



PR43C



PR43L