



GAST MANUFACTURING, INC.
 A Unit of IDEX Corporation
 Post Office Box 97
 Benton Harbor, Michigan
 Ph: 269/926-6171
 Fax: 269/925-8288

PART NUMBER:

LTD169

REV.

C

Product Specifications





MODEL NUMBER	MOTOR SPECIFICATIONS	RPM	MAX VAC		MAX PRESS		HP	kW	NET WT.	
			"H ₂ O	mbar	"H ₂ O	mbar			lbs.	kg
R3105-12	110/220-240-50-1	2850	35	87	40	100	1/3	0,25	29	13,2
* R3105K-12	115/208-230-60-1	3450	50	125	55	137	1/2	0,37	30	13,6

SOUND LEVEL 68/63 dB(A) MAX. @ 60/50 Hz
 NORMAL AMBIENT -29°C TO 40°C
 RELATIVE HUMIDITY 0% - 100% NON CONDENSING
 ENVIRONMENT CLEAN DUST FREE

NOTES:

1. TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
2. * DENOTES INACTIVE MODEL.

Product Performance (Metric U.S. Imperial)

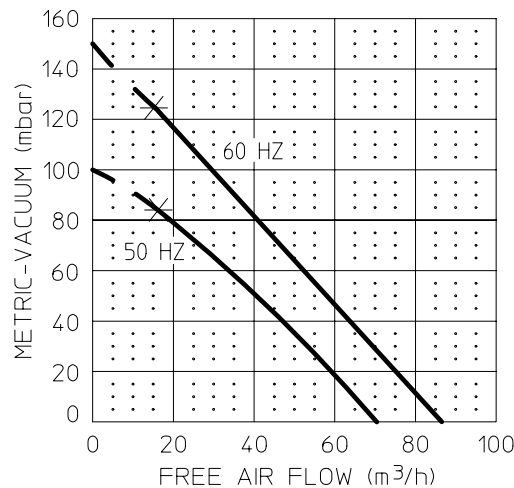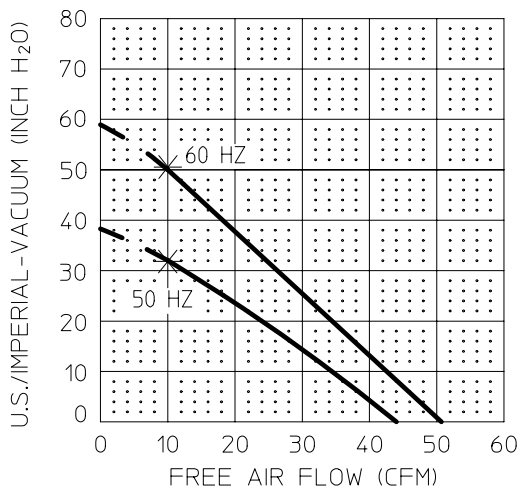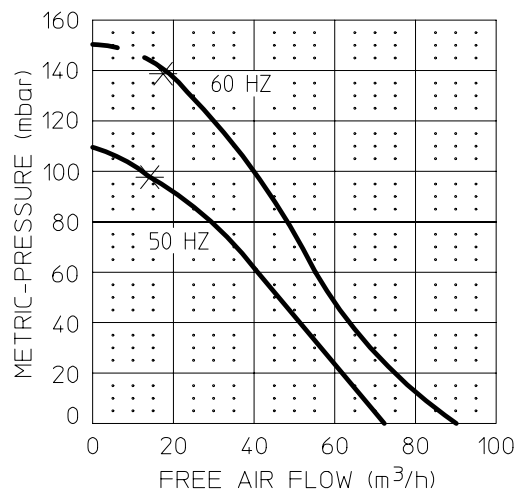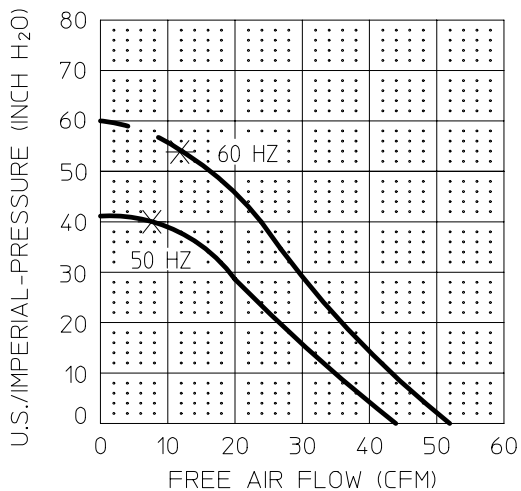

PERFORMANCE DATA

THE PERFORMANCE DATA SHOWN WAS DETERMINED UNDER THE FOLLOWING CONDITIONS:

LINE VOLTAGE @ 60 Hz. 230V OR 460V FOR 3 PHASE UNITS. 115V OR 230V FOR 1 PHASE UNITS.

LINE VOLTAGE @ 50 Hz. 220V FOR 3 PHASE OR 1 PHASE UNITS.

UNITS IN A TEMPERATURE STABLE CONDITION.

DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT THROTTLED.

SUCTION MEASUREMENTS MADE WITH INPUT PORT THROTTLED.

TEST CONDITIONS: INLET AIR DENSITY @ 0.075 lbs. per cu. ft. [20°C (68°F), 29.92" Hg (14.7 PSIA)].

NORMAL PERFORMANCE VARIATIONS ON THE RESISTANCE CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

* DENOTES RECOMMENDED MAXIMUM DUTY
 ---- INTERMITTENT DUTY ONLY

Product Dimensions

Metric (mm) / U.S. Imperial (inches)

Low Voltage, Single Phase

Blue P1 Line
 Brown P2 Tie Together
 Black 5 Insulate
 Orange 3 Tie Together
 White 2 Line
 Yellow 4

High Voltage, Single Phase

Blue P1 Line
 Brown P2 Insulate
 Black 5 Tie Together
 Orange 3 Insulate
 White 2
 Yellow 4 Line

