

Knurled Press-Fit Plungers

Knurled press-fit plungers are easily installed and designed without shoulder for insertion from either end. Ideal where a threaded plunger is impractical or when threaded adjustments are not required.


Knurled press-fit plungers in stainless steel offer the added benefit of maximum protection against rust and corrosion.

Typical Uses







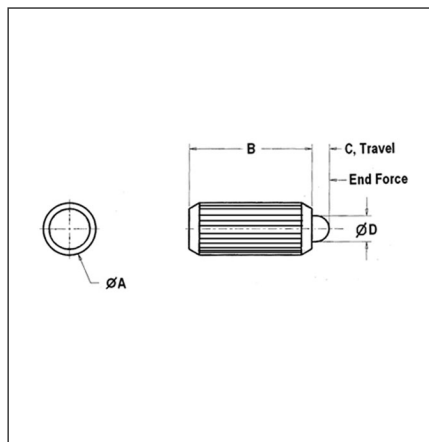

























- Securing
- Indexing
- Locating
- Positioning
- Electrical insulator
- Electrical contact

Special Features

































- Easy installation
- No thread adjustment
- Stainless steel resists corrosion
- Stainless steel withstands high temperatures
- Steel & stainless steel versions with Delrin® Nose



Knurled Press-Fit Plungers w/Standard Plunger Nose

Part No.		End Force, (Lbs.)		A Knurl O.D.	B	C	D	ROHS	CAD Steel	CAD Stainless Steel
Steel	Stainless Steel	Initial	Final							
PFPK51 	SPFPK51 	0.75	2.0	0.210	0.50	0.094	0.121	<input checked="" type="checkbox"/>	PFPK51 	SPFPK51 
PFPK52 	SPFPK52 	1.50	4.5	0.210	0.50	0.094	0.121	<input checked="" type="checkbox"/>	PFPK52 	SPFPK52 
PFPK53 	SPFPK53 	1.25	3.0	0.254	0.58	0.125	0.168	<input checked="" type="checkbox"/>	PFPK53 	SPFPK53 
PFPK54 	SPFPK54 	2.50	6.0	0.254	0.58	0.125	0.168	<input checked="" type="checkbox"/>	PFPK54 	SPFPK54 
PFPK57 	SPFPK57 	2.50	7.0	0.379	0.90	0.187	0.234	<input checked="" type="checkbox"/>	PFPK57 	SPFPK57 
PFPK58 	SPFPK58 	5.00	14.0	0.379	0.90	0.187	0.234	<input checked="" type="checkbox"/>	PFPK58 	SPFPK58 
PFPK59 	SPFPK59 	4.00	9.0	0.504	1.25	0.250	0.332	<input checked="" type="checkbox"/>	PFPK59 	SPFPK59 
PFPK60 	SPFPK60 	8.00	18.0	0.504	1.25	0.250	0.332	<input checked="" type="checkbox"/>	PFPK60 	SPFPK60 

Knurled Press-Fit Plungers w/Delrin® Nose

Part No.		End Force, (Lbs.)		A Knurl O.D.	B	C	C	ROHS	CAD Steel	CAD Stainless Steel
Steel	Stainless Steel	Initial	Final							
DPFPK51 	DSPFPK51 	0.75	2.0	0.210	0.50	0.094	0.121	<input checked="" type="checkbox"/>	DPFPK51 	DSPFPK51 
DPFPK52 	DSPFPK52 	1.5	4.5	0.210	0.50	0.094	0.121	<input checked="" type="checkbox"/>	DPFPK52 	DSPFPK52 
DPFPK53 	DSPFPK53 	1.25	3.0	0.254	0.58	0.125	0.168	<input checked="" type="checkbox"/>	DPFPK53 	DSPFPK53 
DPFPK54 	DSPFPK54 	2.5	6.0	0.254	0.58	0.125	0.168	<input checked="" type="checkbox"/>	DPFPK54 	DSPFPK54 
DPFPK57 	DSPFPK57 	2.5	7.0	0.379	0.90	0.187	0.234	<input checked="" type="checkbox"/>	DPFPK57 	DSPFPK57 
DPFPK58 	DSPFPK58 	5.0	14.0	0.379	0.90	0.187	0.234	<input checked="" type="checkbox"/>	DPFPK58 	DSPFPK58 
DPFPK59 	DSPFPK59 	4.0	9.0	0.504	1.25	0.250	0.332	<input checked="" type="checkbox"/>	DPFPK59 	DSPFPK59 
DPFPK60 	DSPFPK60 	8.0	18.0	0.504	1.25	0.250	0.332	<input checked="" type="checkbox"/>	DPFPK60 	DSPFPK60 

Product not available in metric



Copyright © 2024 Vlier Inc. | All Rights Reserved | A Division of  HUTCHINSON®