

Lever Style Plungers

With Thread Lock & Stainless Steel

The plunger can be fully withdrawn into the body of lever style plungers. The locking variety allows the fully withdrawn plunger to be locked into the retracted position. Stainless steel construction resists rust and corrosion.

Typical Uses


- Positioning
- Fastening
- Securing
- With Thread Lock
- Latching
- Quick disconnect

Special Uses

- Food and medical applications
- Special environments

Special Features

- Lever handle design
- Hand-retractable locking plunger
- Tapered end for easy alignment
- Stainless steel construction
- Unified ANSI and metric threads

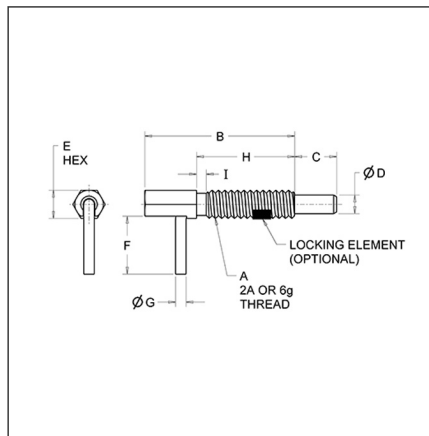

Lever Style Plungers - w/ Thread Lock - Stainless Steel

Part No.		End Force, (Lbs.)		A	B	C	D	E	F	G	H	I	ROHS	CAD	C/W Thread Lock
	With Thread Lock	Initial	Final												
SSFR250	SSFR250P	0.50	2.50	1/4-20	1.25	0.38	0.16	0.25	0.50	0.09	0.80	*	<input checked="" type="checkbox"/>	SSFR250	SS
SSFR375	SSFR375P	0.75	3.75	3/8-16	2.00	0.56	0.25	0.38	0.75	0.14	1.31	0.13	<input checked="" type="checkbox"/>	SSFR375	SS
SSFR500	SSFR500P	1.00	5.00	1/2-13	2.11	0.75	0.31	0.50	1.00	0.19	1.25	0.15	<input checked="" type="checkbox"/>	SSFR500	SS
SSFR625	SSFR625P	1.00	5.00	5/8-11	3.05	1.00	0.38	0.62	1.00	0.19	2.00	0.18	<input checked="" type="checkbox"/>	SSFR625	SS

No thread relief in 1/4-20 thread size and M6 thread for metric.

Lever Style Plungers - Stainless Steel

Part No.		End Force, (Lbs.)		A	B	C	D	E	F	G	H	I	ROHS	CAD
	With Thread Lock	Initial	Final											
SSFRN250	SSFRN250P	0.50	2.50	1/4-20	1.25	0.38	0.16	0.25	0.50	0.09	0.80	*	<input checked="" type="checkbox"/>	SSFRN250
SSFRN375	SSFRN375P	0.75	3.75	3/8-16	2.00	0.56	0.25	0.38	0.75	0.14	1.31	0.13	<input checked="" type="checkbox"/>	SSFRN375
SSFRN500	SSFRN500P	1.00	5.00	1/2-13	2.11	0.75	0.31	0.50	1.00	0.19	1.25	0.15	<input checked="" type="checkbox"/>	SSFRN500
SSFRN625	SSFRN625P	1.00	5.00	5/8-11	3.05	1.00	0.38	0.62	1.00	0.19	2.00	0.18	<input checked="" type="checkbox"/>	SSFRN625

No thread relief in 1/4-20 thread size and M6 thread for metric.

Lever Style Plungers - w/ Thread Lock - Stainless Steel

Part No.		End Force, (Lbs.)		A	B	C	D	E	F	Hex	H	I	ROHS	CAD	CAD With Thread Lock
	With Thread Lock	Initial	Final												
SFRM6	SFRM6P	2.2	11.1	M6 x 1.00	32.0	10.0	4.0	6.0	12.7	2.3	20.0	*	<input checked="" type="checkbox"/>	SFRM6	SFRM6P

SFRM10	SFRM10P	3.3	16.7	M10 x 1.50	51.0	14.0	6.0	10.0	19.0	3.5	33.0	3.3	<input checked="" type="checkbox"/>	SFRM10	SFRM10P
SFRM12	SFRM12P	4.5	22.3	M12 x 1.75	54.0	19.0	8.0	12.0	25.4	4.8	32.0	3.8	<input checked="" type="checkbox"/>	SFRM12	SFRM12P

No thread relief in 1/4-20 thread size and M6 thread for metric.

Lever Style Plungers - Stainless Steel

Part No.		End Force, N		A	B	C	D	E	F	Hex	H	I	ROHS	CAD
	With Thread Lock	Initial	Final											
SSFRNM6	SSFRNM6P	2.0	11.0	M6 x 1.0	32.0	10.0	4.0	6.0	13.0	2.0	20.0	*	<input checked="" type="checkbox"/>	SSFRNM6
SSFRNM10	SSFRNM10P	3.0	17.0	M10 x 1.5	51.0	14.0	6.0	10.0	19.0	4.0	33.0	3.0	<input checked="" type="checkbox"/>	SSFRNM10
SSFRNM12	SSFRNM12P	4.5	22.0	M12 x 1.75	54.0	19.0	8.0	12.0	25.0	5.0	32.0	4.0	<input checked="" type="checkbox"/>	SSFRNM12
SSFRNM16	SSFRNM16P	4.5	22.0	M16 x 2.0	77.0	25.0	10.0	16.0	25.0	5.0	51.0	5.0	<input checked="" type="checkbox"/>	SSFRNM16

No thread relief in 1/4-20 thread size and M6 thread for metric.

Proud to be [ISO:50001](#) and [ISO:9001](#) Certified
Cage Code: 01226



Copyright © 2024 Vlier Inc. | All Rights Reserved | A Division of  | HUTCHINSON®