

# Lever Style Plungers

## With Thread Lock & Steel


Lever style plungers feature a tapered end, making for easy alignment. The locking variety permits the plunger tip to be fully withdrawn into the body, and then locked into position.











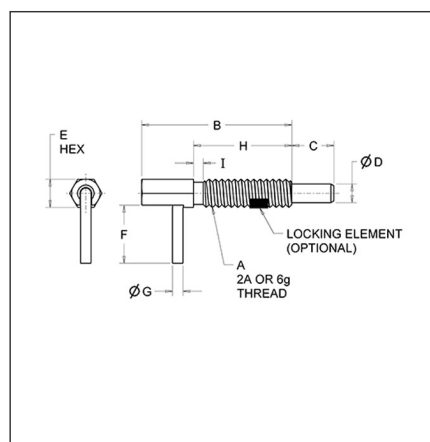





### Typical Uses

- Positioning
- Fastening
- Securing
- With Thread Lock
- Latching
- Quick disconnect

### Special Features

















- Lever handle design
- Hand-retractable locking plunger
- Tapered end for easy alignment
- Steel construction



Part No.		End Force, (Lbs.)		A	B	C	D	E Hex	F	G	H	I	ROHS	CAD	CAD With Thread Lock
	With Thread Lock	Initial	Final												
FR250 	FR250P 	0.50	2.50	1/4-20	1.25	0.38	0.16	0.25	0.50	0.09	0.80	*	<input checked="" type="checkbox"/>	FR250 	FR250P 
FR375 	FR375P 	0.75	3.75	3/8-16	2.00	0.56	0.25	0.38	0.75	0.14	1.31	0.13	<input checked="" type="checkbox"/>	FR375 	FR375P 
FR500 	FR500P 	1.00	5.00	1/2-13	2.11	0.75	0.31	0.50	1.00	0.19	1.25	0.15	<input checked="" type="checkbox"/>	FR500 	FR500P 
FR625 	FR625P 	1.00	5.00	5/8-11	3.05	1.00	0.38	0.62	1.00	0.19	2.00	0.18	<input checked="" type="checkbox"/>	FR625 	FR625P 

No thread relief in 1/4-20 thread size and M6 thread for metric.

### Lever Style Plungers - w/ Thread Lock - Steel

Part No.		End Force, N		A	B	C	D	E	F	G	H	I	ROHS	CAD	CAD With Thread Lock
	With Thread Lock	Initial	Final												
FRM6 	FRM6P 	2.2	11.1	M6 x 1.00	32.0	10.0	4.0	6.0	12.7	2.3	20.0	*	<input checked="" type="checkbox"/>	FRM6 	FRM6P 
FRM10 	FRM10P 	3.3	16.7	M10 x 1.50	51.0	14.0	6.0	10.0	19.0	3.5	33.0	3.3	<input checked="" type="checkbox"/>	FRM10 	FRM10P 
FRM12 	FRM12P 	4.5	22.3	M12 x 1.75	54.0	19.0	7.0	12.0	25.4	4.8	32.0	3.8	<input checked="" type="checkbox"/>	FRM12 	FRM12P 
FRM16 	FRM16P 	4.5	22.0	M16 x 2.00	77.0	25.0	10.0	16.0	25.0	5.0	51.0	5.0	<input checked="" type="checkbox"/>	FRM16 	FRM16P 

No thread relief in 1/4-20 thread size and M6 thread for metric.

Proud to be [ISO:50001](#) and [ISO:9001](#) Certified

Cage Code: 01226



Copyright © 2024 Vlier Inc. | All Rights Reserved | A Division of  | HUTCHINSON®