

Leveling Devices

Original Series Stud Style Extended Length Stainless Steel

Vlier's original series stud style leveling devices in stainless steel have an extended length option for applications where additional clearance is required.

The natural (white) Delrin® plastic base option protects floors and surface finishes. Delrin provides high resistance to repeated impacts, solvents, moisture and temperatures up to 190°F.

The elastomer pad option offers a .125" neoprene elastomer bonded to the bottom of the base for superior non-skid support.


The stainless steel option provides maximum resistance to rust and corrosion.

Typical Uses







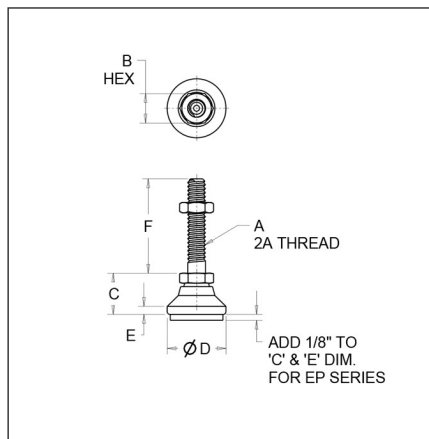







- Data storage equipment
- Large medical equipment
- Material handling equipment
- Industrial workstations
- Industrial machines

Special Features















- Hardened ball
- Stud with integrally machined hex
- Long-life, high-impact Delrin® pad protects surface finish
- Large diameter base support
- 15° swivel off centerline
- Stainless steel option resists rust and corrosion

















Original Series Stud Style Extended Length - Stainless Steel

Part No.	Max Load (Lbs.)	A	B	C	D	E	F	ROHS	CAD
SSP299S 	700	10-32	3/8	17/32	3/4	7/64	2.0	<input checked="" type="checkbox"/>	SSP299S 
SSP301S 	1,100	1/4-20	1/2	45/64	1	5/32	2.5	<input checked="" type="checkbox"/>	SSP301S 
SSP305S 	3,750	3/8-16	5/8	7/8	1-1/4	3/16	4.0	<input checked="" type="checkbox"/>	SSP305S 
SSP307S 	5,000	1/2-13	3/4	1-1/8	1-7/8	1/4	4.0	<input checked="" type="checkbox"/>	SSP307S 
SSP309S 	6,000	5/8-11	7/8	1-1/4	2-1/2	5/16	4.0	<input checked="" type="checkbox"/>	SSP309S 
SSP311S 	7,200	3/4-10	1-1/16	1-1/2	3	1/2	4.0	<input checked="" type="checkbox"/>	SSP311S 
SSP313S 	22,000	1-8	1-3/8	1-7/8	4	13/32	8.0	<input checked="" type="checkbox"/>	SSP313S 

Original Series Stud Style w/Elastomer Pad - Extended Length - Stainless Steel

Part No.	Max Load (Lbs.)	A	B	C	D	E	F	ROHS	CAD
ESSP299S 	525	10-32	3/8	17/32	3/4	7/64	2.0	<input checked="" type="checkbox"/>	ESSP299S 
ESSP301S 	800	1/4-20	1/2	45/64	1	5/32	2.5	<input checked="" type="checkbox"/>	ESSP301S 
ESSP305S 	2,800	3/8-16	5/8	7/8	1-1/4	3/16	4.0	<input checked="" type="checkbox"/>	ESSP305S 
ESSP307S 	3,750	1/2-13	3/4	1-1/8	1-7/8	1/4	4.0	<input checked="" type="checkbox"/>	ESSP307S 
ESSP309S 	4,500	5/8-11	7/8	1-1/4	2-1/2	5/16	4.0	<input checked="" type="checkbox"/>	ESSP309S 
ESSP311S 	5,400	3/4-10	1-1/16	1-1/2	3	1/2	4.0	<input checked="" type="checkbox"/>	ESSP311S 
ESSP313S 	16,400	1-8	1-3/8	1-7/8	4	13/32	8.0	<input checked="" type="checkbox"/>	ESSP313S 

Original Series Stud Style w/Delrin® Base - Extended Length - Stainless Steel

Part No.	Max Load (Lbs.)	A	B	C	D	E	F	ROHS	CAD
SSNP299S 	150	10-32	3/8	17/32	3/4	7/64	2.0	<input checked="" type="checkbox"/>	SSNP299S 
SSNP301S 	200	1/4-20	1/2	45/64	1	5/32	2.5	<input checked="" type="checkbox"/>	SSNP301S 
SSNP305S 	300	3/8-16	5/8	7/8	1-1/4	3/16	4.0	<input checked="" type="checkbox"/>	SSNP305S 
SSNP307S 	700	1/2-13	3/4	1-1/8	1-7/8	1/4	4.0	<input checked="" type="checkbox"/>	SSNP307S 
SSNP309S 	1,200	5/8-11	7/8	1-1/4	2-1/2	5/16	4.0	<input checked="" type="checkbox"/>	SSNP309S 
SSNP311S 	1,800	3/4-10	1-1/16	1-1/2	3	1/2	4.0	<input checked="" type="checkbox"/>	SSNP311S 
SSNP313S 	2,400	1-8	1-3/8	1-7/8	4	13/32	8.0	<input checked="" type="checkbox"/>	SSNP313S 

Product not available in metric.

Proud to be ISO:50001 and ISO:9001 Certified

Cage Code: 01226



Copyright © 2024 Vlier Inc. | All Rights Reserved | A Division of  HUTCHINSON®