













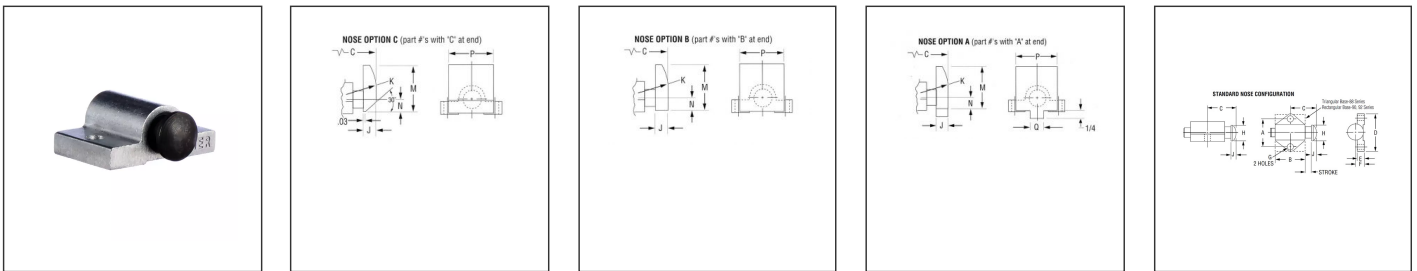



Spring Stops

Vlier's spring stops provide accurate, controlled end forces in a range of applications where fixture walls are not available. The spring-loaded stops have an aluminum body design, and feature the option of a steel or Delrin® Nose, which has electrical insulating properties and prevents marring of soft metals such as brass and aluminum.




Typical Uses

Workholding and fixtures applications.



Part No.	End Force			Stroke	A	B	C	D	E	F	G	H	K	J	
	Initial	Mid	Final												
SS88 	5.13	10	14.58	1/8	0.656	0.688	0.593	0.875	0.187	0.218	0.136	0.375	-	0.125	
SS88A 	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.
SS88B 	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.
SS88C 	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.
SS90 	2.25	14	25.75	3/16	1.125	1.000	0.875	1.500	0.250	0.312	0.203	0.562	-	0.187	
SS90A 	2.25	14	25.75	3/16	1.125	1.000	0.938	1.500	0.250	0.312	0.203	-	1.00	0.250	0.
SS90B 	2.25	14	25.75	3/16	1.125	1.000	0.938	1.500	0.250	0.312	0.203	-	1.00	0.250	0.
SS90C 	2.25	14	25.75	3/16	1.125	1.000	0.938	1.500	0.250	0.312	0.203	-	1.00	0.250	0.
SS92 	16.50	32	47.50	1/4	1.500	1.375	1.312	2.000	0.250	0.437	0.266	0.812	-	0.281	
SS92A 	16.50	32	47.50	1/4	1.500	1.375	1.312	2.000	0.250	0.437	0.266	-	1.25	0.375	1
SS92B 	16.50	32	47.50	1/4	1.500	1.375	1.312	2.000	0.250	0.437	0.266	-	1.25	0.375	1
SS92C 	16.50	32	47.50	1/4	1.500	1.375	1.312	2.000	0.250	0.437	0.266	-	1.25	0.375	1

Spring Stops w/ Delrin® Nose

Part No.	End Force			Stroke	A	B	C	D	E	F	G	H	K	J	M	N
	Initial	Mid	Final													
NSS88 	5.13	10	14.58	1/8	0.656	0.688	0.593	0.875	0.187	0.218	0.136	0.375	-	0.125	-	-
NSS90 	2.25	14	25.75	3/16	1.125	1.000	0.875	1.500	0.250	0.312	0.203	0.562	-	0.187	-	-
NSS92 	16.50	32	47.50	1/4	1.500	1.375	1.218	2.000	0.250	0.437	0.266	0.812	-	0.281	-	-

Product not available in metric.

Proud to be [ISO:50001](#) and [ISO:9001](#) Certified

Cage Code: 01226

