

Stubby Pull Ring Plungers

With Thread Lock & Steel


Stubby pull ring plungers in steel offer a shorter plunger body for limited space applications, and provide an easy to grasp pull-ring handle for withdrawing and engaging the plunger.

Typical Uses







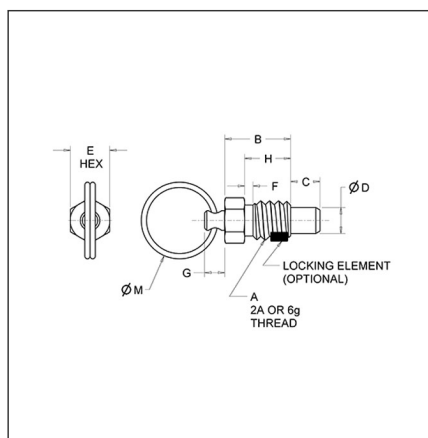








- Positioning
- Fastening
- Securing
- With Thread Lock
- Latching
- Quick disconnect

Special Features

- Pull-ring stubby design
- Hand-retractable non-locking plunger
- Withstands side loading
- Tapered end for easy alignment
- Steel construction















Stubby Pull Ring Plungers - Steel

Part No.		End Force, (Lbs.)		A	B	C	D	E Hex	F	G	H	M	ROHS	CAD
		Initial	Final											
PRSN250 	PRSN250P 	0.50	2.0	1/4-20	0.44	0.19	0.16	0.25	*	0.18	0.31	0.62	<input checked="" type="checkbox"/>	PRSN250 
PRSN250A 	PRSN250AP 	0.50	2.0	1/4-20	0.44	0.19	0.16	0.25	*	0.18	0.31	0.75	<input checked="" type="checkbox"/>	PRSN250A 
PRSN375 	PRSN375P 	0.75	3.0	3/8-16	0.63	0.28	0.25	0.38	0.13	0.19	0.44	0.75	<input checked="" type="checkbox"/>	PRSN375 
PRSN500 	PRSN500P 	1.00	4.0	1/2-13	0.81	0.38	0.31	0.5	0.13	0.25	0.56	1	<input checked="" type="checkbox"/>	PRSN500 
PRSN625 	PRSN625P 	1.25	5.0	5/8-11	1.00	0.44	0.38	0.62	0.13	0.31	0.69	1	<input checked="" type="checkbox"/>	PRSN625 

No thread relief in 1/4-20 thread size and M6 thread for metric.

Stubby Pull Ring Plungers - Steel

Part No.		End Force, N		A	B	C	D	E	F	G	H	M	ROHS	CAD	CAD With Threa Lock
		Initial	Final												
PRSNM6 	PRSNM6P 	2.2	8.9	M6 x 1.0	11.0	5.0	4.0	13.0	*	4.6	8.0	19.0	<input checked="" type="checkbox"/>	PRSNM6 	PRSN
PRSNM10 	PRSNM10P 	3.3	13.3	M10 x 1.5	16.0	7.0	6.0	10.0	3.0	4.8	11.0	19.0	<input checked="" type="checkbox"/>	PRSNM10 	PRSN
PRSNM12 	PRSNM12P 	4.4	17.8	M12 x 1.75	21.0	10.0	8.0	12.0	3.0	6.4	14.0	25.0	<input checked="" type="checkbox"/>	PRSNM12 	PRSN
PRSNM16 	PRSNM16P 	5.6	22.2	M16 x 2.0	25.4	11.0	9.5	16.0	3.0	8.0	18.0	25.0	<input checked="" type="checkbox"/>	PRSNM16 	PRSN

No thread relief in 1/4-20 thread size and M6 thread for metric.

Proud to be [ISO:50001](#) and [ISO:9001](#) Certified

Cage Code: 01226



Copyright © 2024 Vliet Inc. | All Rights Reserved | A Division of  HUTCHINSON®