

T-Handle Retractable Plungers

With Thread Lock & Steel


With Thread Lock T-handle retractable plungers in steel can be easily grasped on account of their design, allowing for easy withdrawal and engagement.

Typical Uses

- Positioning
- Fastening
- Securing
- With Thread Lock
- Latching
- Quick disconnect

Special Features

- T-Handle design
- Hand-retractable non-locking plunger
- Withstands side loading
- Tapered end for easy alignment
- Steel construction

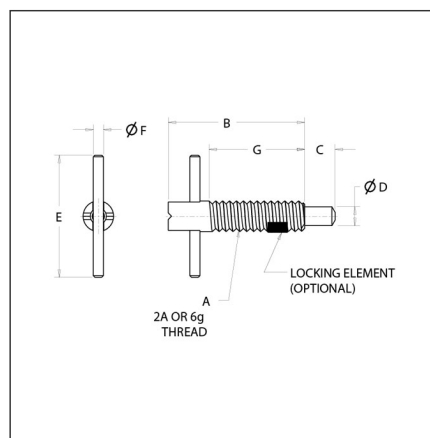

T-Handle Retractable Plungers - w/ Thread Lock & - Steel

Part No.		End Force, (Lbs.)		A	B	C	D	E	F	G	ROHS	CAD	CAD With Thread Lock
	With Thread Lock	Initial	Final										
FRT250	FRT250P	1.0	2.5	1/4-20	1.14	0.250	0.155	1.13	0.13	0.8	<input checked="" type="checkbox"/>	FRT250	FRT250P
FRT375	FRT375P	2.0	4.0	3/8-16	1.68	0.375	0.233	1.50	0.13	1.2	<input checked="" type="checkbox"/>	FRT375	FRT375P
FRT500	FRT500P	2.5	5.0	1/2-13	2.00	0.500	0.312	2.00	0.16	1.4	<input checked="" type="checkbox"/>	FRT500	FRT500P
FRT625	FRT625P	2.5	5.0	5/8-11	2.38	0.625	0.375	2.50	0.19	1.7	<input checked="" type="checkbox"/>	FRT625	FRT625P

T-Handle Retractable Plungers - w/ Thread Lock & - Steel

Part No.		End Force, N		A	B	C	D	E	F	G	ROHS	CAD	CAD With Thread Lock
	With Thread Lock	Initial	Final										
FRTM6	FRTM6P	4.4	11.0	M6 x 1.0	29.0	6.4	4.0	29.0	3.3	20.3	<input checked="" type="checkbox"/>	FRTM6	FRTM6P
FRTM10	FRTM10P	9.0	17.8	M10 x 1.5	43.0	9.5	6.0	38.0	3.3	30.5	<input checked="" type="checkbox"/>	FRTM10	FRTM10P
FRTM12	FRTM12P	11.0	22.0	M12 x 1.75	51.0	12.7	8.0	51.0	4.0	35.5	<input checked="" type="checkbox"/>	FRTM12	FRTM12P
FRTM16	FRTM16P	11.0	22.0	M16 x 2.0	60.0	16.0	10.0	64.0	4.8	43.0	<input checked="" type="checkbox"/>	FRTM16	FRTM16P

Proud to be [ISO:50001](#) and [ISO:9001](#) Certified

Cage Code: 01226



Copyright © 2024 Vlier Inc. | All Rights Reserved | A Division of | HUTCHINSON®